

2 in. Character Size Identification Tags

POLY TAGS TWO COLOR INJECTION MOLDED

MATERIAL

High impact polyolefin with excellent cold impact resistance. UV stabilizers and antioxidants added to provide complete protection and weather resistance in all climates.

ITEM CODE


EL2XXxxx

- X=Y for Yellow background (standard)
- X=K for Black copy (standard)
- X=O for Orange background
- xxx=Copy code (see list on reverse)


SEE LIST ON
REVERSE FOR
STOCK SYMBOLS

SPECIFY AS

1.6 in. x 2.6 in. x 0.08 in. thick tags with injection molded characters integral with locking grids. Color additives and UV stabilizers molded throughout the tags. Both copy and background have a minimum thickness of 0.040 in. (1 mm)

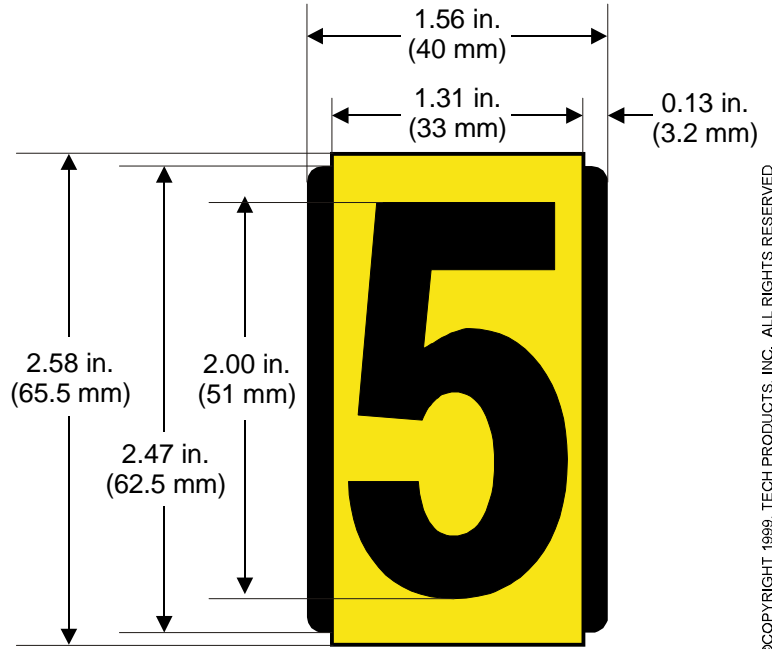


ACTUAL SIZE

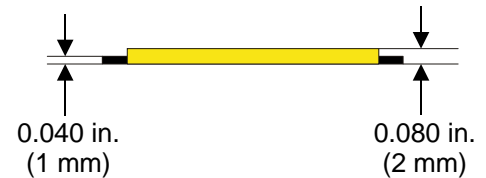

©COPYRIGHT 1999, TECH PRODUCTS, INC. ALL RIGHTS RESERVED

First Shot

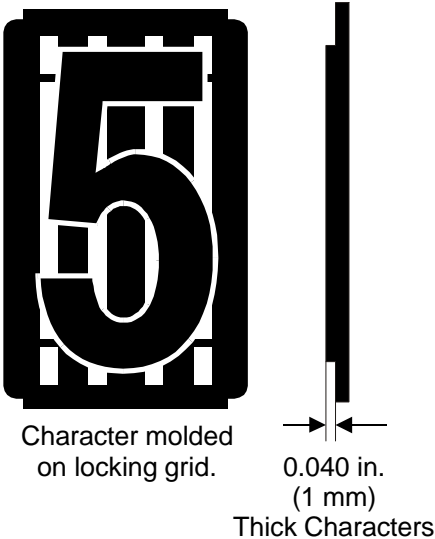

Second Shot Molding Process



Second shot resin locks with the first shot grid. Both background and characters have a minimum thickness of 0.040 in. (1 mm)

INSTALLATION GUIDELINES

Tags can be used for vertically oriented installations by using vertical tag holders. Holders are available in aluminum, preferred for outdoors or, for applications where non-conductivity is of importance, in polyethylene (Spec Sheet **SPECAPH2**).

TECH
PRODUCTS, INC.

Tel: (800) 221-1311 or (718) 442-4900 or Fax: (718) 442-2124

e-mail: team@techproducts.com

Visit us at: www.techproducts.com

SPEC2EVL
09/04